

# LARGE-FORMAT PLASTIC 3D PRINTING: AUTOMOTIVE HVAC HOUSING PRODUCED IN ONE SINGLE-PIECE WITH FARSOON CAMS HT1001P

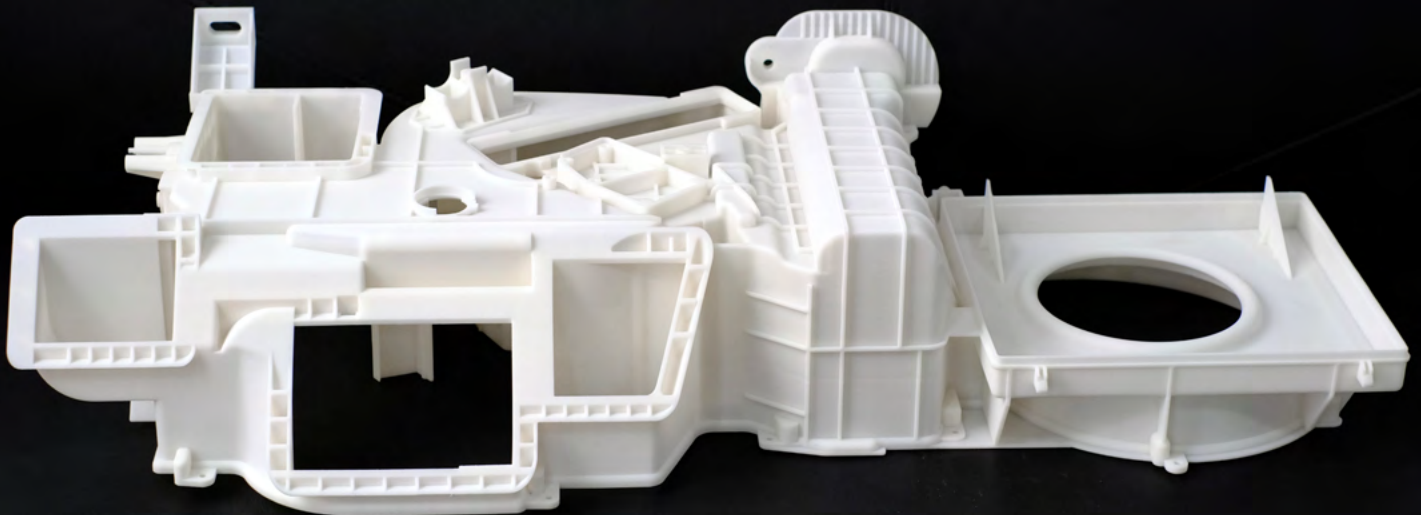


Figure 1: HVAC housing overall structure size: 950mm x423mm x207mm. Image courtesy: SAPW

## ↓ Project Overview

<b>CHALLENGES</b>	Increasing product lines & engineering demands Tight R&D time cycles Quality standard for functional parts Customized designs
<b>SOLUTION</b>	Farsoon plastic LPBF system 403P with FS3300PA material
<b>KEY BENEFITS</b>	Improved cost-performance Advanced manufacturing tool Streamlined design - manufacturing process Alternative supply chain

# Accelerating Innovation & Manufacturing on Large-scale Automotive Functional Applications - Through Additive Manufacturing.

Farsoon Technologies in collaboration with **SAPW Automotive Technology Co.** has printed a single-piece polymer automotive HVAC (Heating Ventilating Air Conditioning) unit on the new Farsoon **HT1001P CAMS®** (Continuous Additive Manufacturing Solution) system. This particular HVAC unit measured 37.4 in x 16.6 in x 8.2 in (950mm x423mm x207mm) and is used for the heating, ventilating, and air conditioning system installed in the dashboard of all automobiles manufactured today.

## ↓ Manufacturing a HVAC Unit: Traditional Technologies & Complications

### Traditional Technologies: CNC Method

While CNC is a well known and widely used method of creating models, the high cost of equipment and high technical requirements for personnel detract from the benefits. Due to the tool diameter, length and cutter clearance, any part with the length exceeding 3.4 in (100mm) needs to be sectioned into smaller pieces then assembled. Additionally, certain features and under-cuts require repositioning of the workpiece, forcing accuracy to be dependent largely on the experience of the personnel and the quality of the work-holding devices rather than the inherent accuracy of CNC equipment.

#### Steps for Manufacturing with CNC:

- Step 1: Divide the three-dimensional data into smaller pieces and program each piece to be processed separately by the CNC equipment.  
Time required: ~ 4 - 6 hours per piece
- Step 2: CNC milling machine is used to cut all pieces.  
Time required: ~ 50 hours
- Step 3: Manual trimming, polishing and joining of sectioned pieces.  
Time required: ~ 4 - 6 hours per piece

CNC Process: ~ 62 hours total needed to manufacture one single part

### Traditional Technologies: Silicone Molding Method

Demerits: high cost of single part, low intensity, long assembly time and low precision.  
It should also be noted that silicone mold is very sensitive to

pressure and heating conditions, considerable shrinkage may occur to the silicone and liquid materials during the curing process. Also the process of the silicon mold is of complicated multiple steps and techniques, these factors resulting in the precision of product size not being guaranteed, generally more than 0.5mm/100mm, while in automotive prototyping the tolerance is 0.2mm/100mm.

- Step 1: Produce the prototype. This is generally done with an SLA process.  
Time required: ~ 70 hours to produce mold master
- Step 2: Place the SLA product into a build box then pour silicone rubber into the box. Allow silicone rubber to cure.  
Time required: ~ 6 hours for silicone rubber to be completely cured
- Step 3: Cut the solidified silicone mold and remove the SLA prototype from inside. Trim off excess silicone to insure a good mold piece fit then seal the silicone mold. In a vacuum casting system or manual processes, pour liquid urethane materials into the silicone mold through the pouring gate. Heat to solidify.  
Time required: ~ 4 hours
- Step 4: Separate the silicone mold and remove the silicone part. Trim the flown edge and polish for finished product.  
Time required: ~ 6 hours per person

Silicone Molding Process: ~ 120 hours needed to manufacture one mold master and mold and cast one complete part.

The traditional silicone process is labor intensive and requires multiple persons to create multiple silicone molds. Accuracies can vary from part to part and the process is typically measured in days, not hours.

## ↓ Why 3D Printing is beneficial for the Automotive Industry

### Single-Piece Formation of Complex Structure

The HVAC design features numerous interior structures such as indentations and buckle structures. If produced using the CNC method, the HVAC will have to be processed in several

pieces then assembled. This is time consuming and laborious while the junctions can enable failure points and size deviations which create fit issues. Compared to 3D printing, the single-piece HVAC formation will print in one-piece producing a part with smoother surface textures, higher part strength, no fastener failure points, and saving time and labor which will lower costs.

### Freedom of Design and Innovation

Traditional automobile manufacturing processes of high complex structures need specific tooling and processing such as press tool stamping which have constraints of tool size and angles. Due to these limitations, when processing certain details and structures the design is extremely difficult to accomplish. This can cause a set back and compromise the part functionality when producing an innovative design. However, 3D printing is a tool-free process and by converting the complex irregular-shaped structure to successive layer processing can allow full freedom for design and innovation.

### Vehicle Development Cycle Shortened

The cycle of vehicle development is time sensity for launching products and consists is a long and complicated process from product planning to market. The longest vehicle development cycle for traditional manufacturing usually takes up to 57 months. Most of the time is being spent on R&D parts and integration, system verification, automobile manufacturing and quality control. The most time-consuming work is the manufacture of the equipment and the development of molds which can take up to a year to complete.

Farsoon 3D printing has numerous technical advantages which rely on quick correction of design errors, improved production efficiency, and reduction of developmental costs. Compared


to traditional mold development, as well as the forging, casting and other complex processes, the intermediate link is simplified and the development cycle is shortened. The prototyping cycle of this HVAC mold by 3D printing is only 10 hours compared to traditional manufacturing processes, 62 hours for CNC and 120 hours for making silica mold.

### Introducing the HT1001P CAMS® Systems and Its Advantages

Due to the HVAC part size length dimension being 37.4 in (950mm), if produced in an average size SLS (Selective Laser Sintering) additive manufacturing 3d printing systems of 15.7 in x 15.7 in x 17.7 in (400mm x 400mm x 450mm) it would need to be built in several parts then assembled and polished. This can cause strength issues, stitch lines and additional complications. Production of the parts would also be 48+ hours for data processing, sintering, and post-processing.

However, Farsoon's HT1001P, equipped with a build cylinder size of 39.4 in x 19.7 in x 17.7 in (1000mm x 500mm x 450mm) makes printing the HVAC in one single piece possible. It not only improves efficiency but also eliminates the process of assembling and polishing of the jointed positions as well as being produced in 10 hours.

Adhering to the concept of turning 3D printing into direct manufacturing, the HT1001P is tailored for the industrialization of additive manufacturing with a build time rate of up to 15L/h. The HT1001P is capable of serial production of many parts with production efficiency of nearly 100%, and large size prototype manufacturing for automotive, aerospace, consumer products and numerous other industries. The high-temperature sintering ability is suitable for materials with sintering temperature under 220°C .

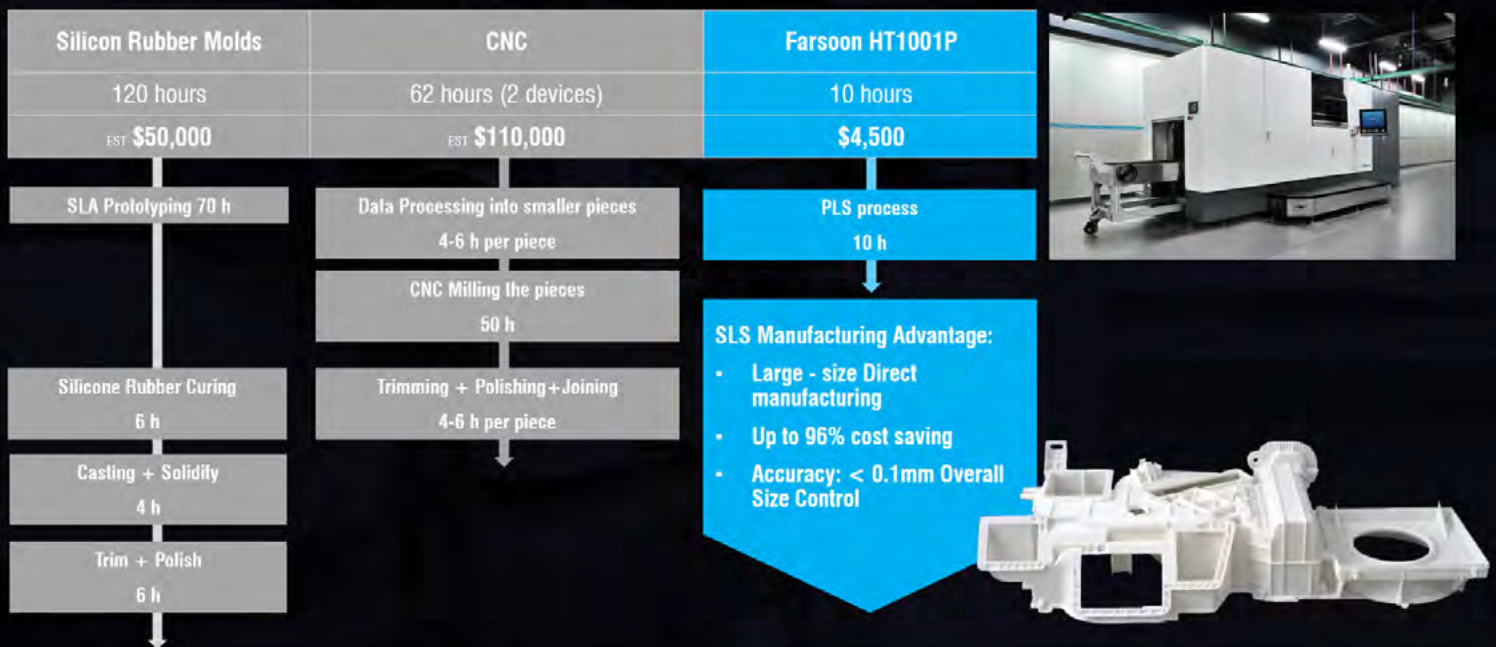

## ↓ Farsoon's Plastic Laser PBF Systems

▼ HT1001P

▼ 403P Series

▼ FLIGHT 403P Series

▼ FLIGHT 252P Series

▼ 252P Series

▼ eForm



## ↓ Contact Us

### AMEA

Farsoon Technologies  
Add: No. 181 Linyu Road, Changsha National  
High-Tech Industrial Zone, Hunan, China  
Tel: +86.731.8397.6198  
Email: [globalinfo@farsoon.com](mailto:globalinfo@farsoon.com)

### AMERICAS

Farsoon Americas CORP  
Add: 3141 Eagles Nest Blvd, Suite 230,  
Round Rock, TX 78665  
Tel: +1 512-686-2866  
Email: [info@farsoonam.com](mailto:info@farsoonam.com)

### EUROPE

Farsoon Europe GmbH  
Add: Curiestr. 2, 70563 Stuttgart, Germany  
Tel: +49 711-6740-0305  
Email: [wehelpyou@farsoon-eu.com](mailto:wehelpyou@farsoon-eu.com)

### RUSSIA

Senior Business Development Manager CIS  
Nikita Voronov  
Tel: +7 985-114-74-04  
Email: [nikita.voronov@farsoon.com](mailto:nikita.voronov@farsoon.com)

**For more information, please visit:**

[www.farsoon.com](http://www.farsoon.com)



Farsoon reserves the right to change the technical data without notice.  
Please request latest information from Team Farsoon. Last Change:  
2021-04-30